
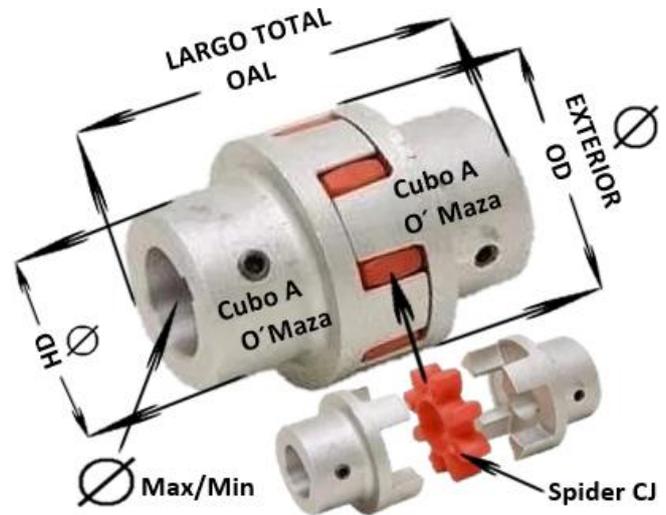


## COPELOVEJOY **CJ** ACERO FUNDICION MAZAS ESCALONADAS

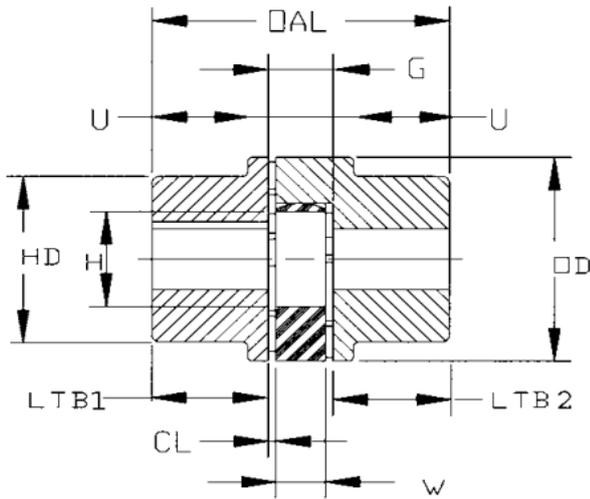

### Configuración "AA"

Tipo	Cubo	Fundición		LTB1 Y LTB2	G	CL	W	OAL	T;U	OD	H	Par Nominal (Nm)	
		Ø Min/Max	HD									92 Sh	98 Sh
14 *	B	S-16	-	11	13	1,5	10	35		30	10	7,5	12,5
	BX	S-16	-	18,5	13	1,5	10	50		30	10		
19/24	A	S-19	32	25	16	2	16	66	20	40	18	10	17
	B	S-24	-	25	16	2	16	66		40	18		
24/32	BX	S-24	-	37	16	2	16	90		40	18		
	A	S-24	40	30	18	2	18	78	24	56	27	35	60
	B	S-32	-	30	18	2	18	78		56	27		
28/38	BX	S-32	-	50	18	2	18	118		56	27		
	A	S-28	48	35	20	2,5	20	90	28	65	30	95	160
	B	11-38	-	35	20	2,5	20	90		65	30		
38/45	BX	S-38	-	60	20	2,5	20	140		65	30		
	A	S-38	66	45	24	3	24	114	37	80	38	190	325
	B	12-45	-	45	24	3	24	114		80	38		
42/55	BX	S-45	-	70	24	3	24	164		80	38		
	A	S-42	75	50	26	3	26	126	40	95	46	265	450
	B	36-55	-	50	26	3	26	126		95	46		
48/60	BX	S-42	-	75	26	3	26	176		95	46		
	A	S-48	85	56	28	3,5	28	140	45	105	51	310	525
	B	42-60	-	56	28	3,5	28	140		105	51		
55/70	BX	S-48	-	80	28	3,5	28	188		105	51		
	A	S-55	98	65	30	4	30	160	52	120	60	410	685
	B	49-70	-	65	30	4	30	160		120	60		
65/75	BX	S-55	-	90	30	4	30	210		120	60		
	A	S-65	115	75	35	4,5	35	185	47	135	68	625	940
	B	59-75	-	75	35	4,5	35	185		135	68		
75/90	BX	S-75	-	100	35	4,5	35	235		135	68		
	A	S-75	135	85	40	5	40	210	53	160	80	1280	1920
	B	52-90	-	85	40	5	40	210		160	80		
90/100	BX	S-90	-	110	40	5	40	260		160	80		
	A	S-90	160	100	45	5,5	45	245	62	200	100	2400	3600
	B	81-100	-	100	45	5,5	45	245		200	100		
100 **	B	42-100	200	110	50	6	50	270		200	100	3300	4950
110 **	B	62-125	230	120	55	6,5	55	295		225	113	4800	7200
125 **	B	12-145	265	140	60	7	60	340		255	127	6650	10000

## SELECCIÓN DE SPIDER LOVEJOY CJ


DUREZA DEL SPIDER

AMARILLO 92 Sh



ROJO 98 sh




Size	A		H		W	
	in	mm	in	mm	in	mm
<b>14</b>	1.18	30	0.39	10	0.39	10
<b>19/24</b>	1.57	40	0.71	18	0.47	12
<b>24/32</b>	2.16	55	1.06	27	0.55	14
<b>28/38</b>	2.56	65	1.15	29	0.59	15
<b>38/45</b>	3.15	80	1.50	38	0.71	18
<b>42/55</b>	3.74	95	1.81	46	0.79	20
<b>48/60</b>	4.13	105	2.01	51	0.83	21
<b>55/70</b>	4.72	120	2.36	60	0.87	22
<b>65/75</b>	5.31	135	2.68	68	1.02	26
<b>75/90</b>	6.30	160	3.15	80	1.18	30
<b>90/100</b>	7.87	200	3.94	100	1.34	34
<b>100/110</b>	8.86	225	4.45	113	1.50	38
<b>110/125</b>	10.04	255	5.00	127	1.65	42
<b>125/145</b>	11.42	290	5.79	147	1.81	46
<b>140</b>	12.60	320	6.50	165	1.97	50
<b>160</b>	14.57	370	7.48	190	2.24	57
<b>180</b>	16.54	420	8.66	220	2.52	64

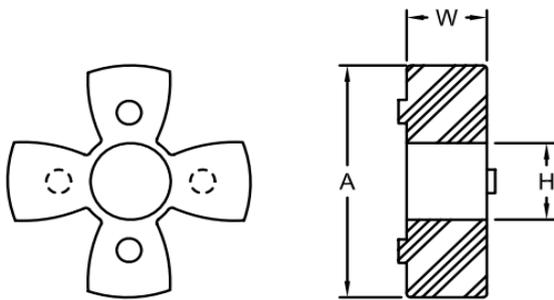


CJ 14

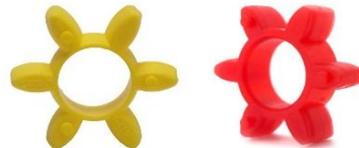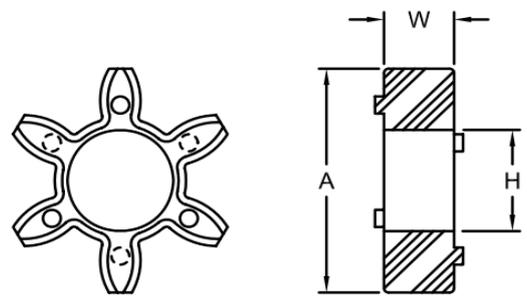

CJ 19/24

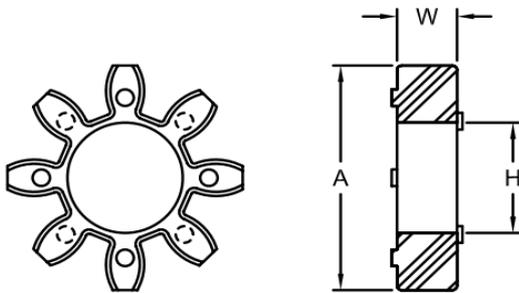

CJ 24/32 - 65/75

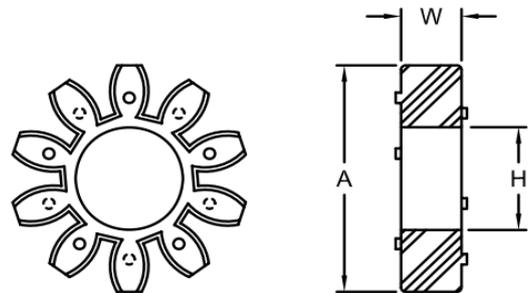

CJ 75/90 - 125/145

