




Tecnología de cadenas de rodillos




Energía impulsiva de alta Calidad

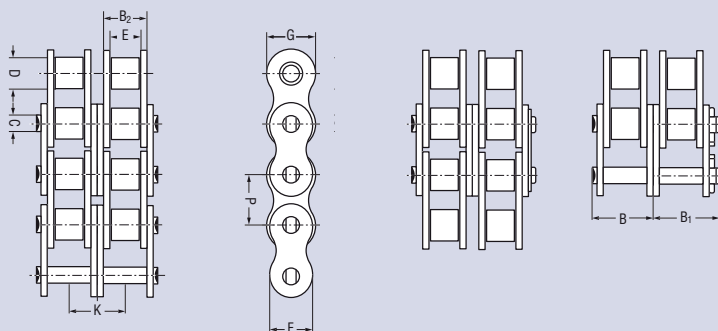

Cadena de rodillos doble ANSI

No. cadena	Paso		Dimensiones en mm									Carga de rotura mín. N	Peso q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E min.	F	G			K	VF	VS	GG
25-2		0,250	6,350	7,11	7,91	4,80	2,32	3,30	3,18	5,01	5,81	6,40	6940	0,250	*	*	*
35-2		0,375	9,525	11,21	12,61	7,46	3,59	5,08	4,78	7,80	9,04	10,13	15650	0,630	*	*	*
40-2		0,500	12,700	15,45	17,53	11,17	3,98	7,92	7,92	10,41	12,06	14,38	28200	1,220	*	*	*
50-2		0,625	15,875	19,18	21,58	13,84	5,09	10,16	9,52	13,01	15,08	18,11	44400	2,000	*	*	*
60-2		0,750	19,050	24,10	26,80	17,75	5,96	11,91	12,70	15,64	18,09	22,78	63600	2,870	*	*	*
80-2		1,000	25,400	31,10	35,20	22,60	7,94	15,87	15,88	20,82	24,13	29,29	113400	5,050	*	*	*
100-2		1,250	31,750	38,14	42,04	27,45	9,54	19,05	19,05	26,03	30,16	35,76	177000	7,860	*	*	*
120-2		1,500	38,100	48,13	52,33	35,45	11,11	22,22	25,40	31,24	36,19	45,44	254000	11,200	*	*	*
140-2		1,750	44,450	51,57	56,97	37,18	12,71	25,40	25,40	36,44	42,22	48,87	344800	14,660	*	*	*
160-2		2,000	50,800	62,41	65,21	45,21	14,29	28,57	31,75	41,65	48,26	58,55	453600	18,640	*	*	*
200-2		2,500	63,500	75,95	82,15	54,88	19,85	39,67	38,10	52,07	60,32	71,55	707600	31,630	*	*	*
240-2		3,000	76,200	92,90	99,20	67,81	23,81	47,63	47,63	62,48	72,39	87,83	1020600	48,400	*	*	*

Para cadenas triples véase página 18.

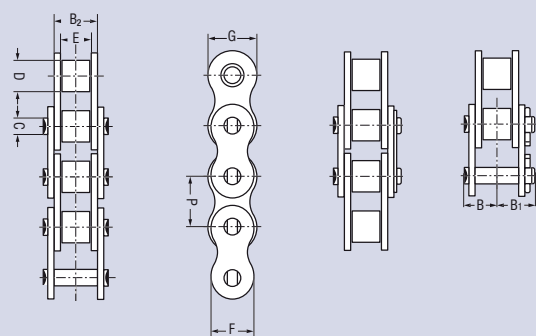




Cadena de rodillos simple ANSI serie H

No. cadena	Paso p		Dimensiones en mm									Carga de rotura mín. N	Peso q kg/m				
	Ansi	inch	mm	B	B ₁ max.	B ₂ max.	C max.	D max.	E mín.	F	G			K	VF	VS	GG
60-1 H		0,750	19,050	14,40	16,90	19,43	5,96	11,91	12,70	15,64	18,09	—	55000	1,730	*	*	*
80-1 H		1,000	25,400	17,95	22,05	24,28	7,94	15,87	15,88	20,82	24,13	—	90000	2,970	*	*	*
100-1 H		1,250	31,750	21,40	25,20	29,10	9,54	19,05	19,05	26,03	30,16	—	140000	4,490	*	*	*
120-1 H		1,500	38,100	26,50	31,30	37,18	11,11	22,22	25,40	31,24	36,19	—	165000	6,260	*	*	*
140-1 H		1,750	44,450	28,30	33,10	38,90	12,71	25,40	25,40	36,44	42,22	—	268000	8,150	*	*	*
160-1 H		2,000	50,800	33,60	38,10	46,48	14,29	28,57	31,75	41,65	48,26	—	308500	10,300	*	*	*




Para cadenas dobles véase página 23.

* = Las piezas de conexión están disponibles.




Componentes de cadena Link-Belt






**Eslabón de unión
de clip**






**Eslabón de unión
con pasador**



**Eslabón exterior
remachado**



**Eslabón acodado
doble**



**Eslabón acodado
con pasador**

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

25-2. -3

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

25-2 SS

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS

35-2. -3

40-2. -3

50-2. -3

60-2. -3

80-2. -3

100-2. -3

120-2. -3

160-2. -3

200-2. -3

06 B-2. -3

08 B-2. -3

10 B-2. -3

12 B-2. -3

16 B-2. -3

20 B-2. -3

24 B-2. -3

28 B-2. -3

32 B-2. -3

35-2 SS

40-2 SS

50-2 SS

60-2 SS

80-2 SS

06 B-2 SS

08 B-2 SS

10 B-2 SS

12 B-2 SS

16 B-2 SS