

TIMKEN

The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Part Number CW-6S, Aurora Bearing CW-S & CG-S Series Female Rod Ends with Studs - General Purpose - Economy




- Body - Low carbon steel - protective coated for corrosion resistance.
- Ball - Alloy steel - heat treated - hard chrome plated.
- Stud - Low carbon steel - protective coated for corrosion resistance. Right hand threads are standard.
- Left hand units have identification groove near end of shank.
- Grease Fitting available for sizes -4 and up. Units are supplied without grease fittings. When a grease fitting is required, specify by adding suffix "Z" or "F". Ex.: CW-6SZ = Zerk Type Fitting CW-6SF = Flush Type Fitting.
- Optional grease fitting is supplied, standard, in **right hand** location (with stud facing away from you). Specify if **left hand** location is desired.

Key Dimensions

Part Number	CW-6S
Thread Type	Right Hand
Thread Configuration	Female
W - Ball Width	.500 in
H - Head Width	.359 in
A - Base to Center	1.625 in
D - Head Diameter	1.000 in
K - Shank Diameter	.687 in
J - Wrench Flat Width	.562 in
Ball Diameter	.719 in
C - Thread Depth [inch]	.812 in
L - Center to End of Stud	1.562 in
N - Stud Shank Length	.906 in
M - Stud Thread Length	.812 in
Thread Size	3/8-24
Thread Class	UNF-2B
Thread Class Stud	UNF-2A
Hex Stud	.500 in
a - Misalignment Angle Clevis Total	45 °
Ultimate Radial Static Load Capacity	1,014 lbs

Approximate Brg. Weight	.17 lb
Lubrication Options	Zerk Fitting or Flush Fitting
Grease Fitting Location	Right Hand or Left Hand
Note	For dimensional tolerances of listed features, see the PDF version of the catalog under the "View Product Catalogs" tab from the home page.

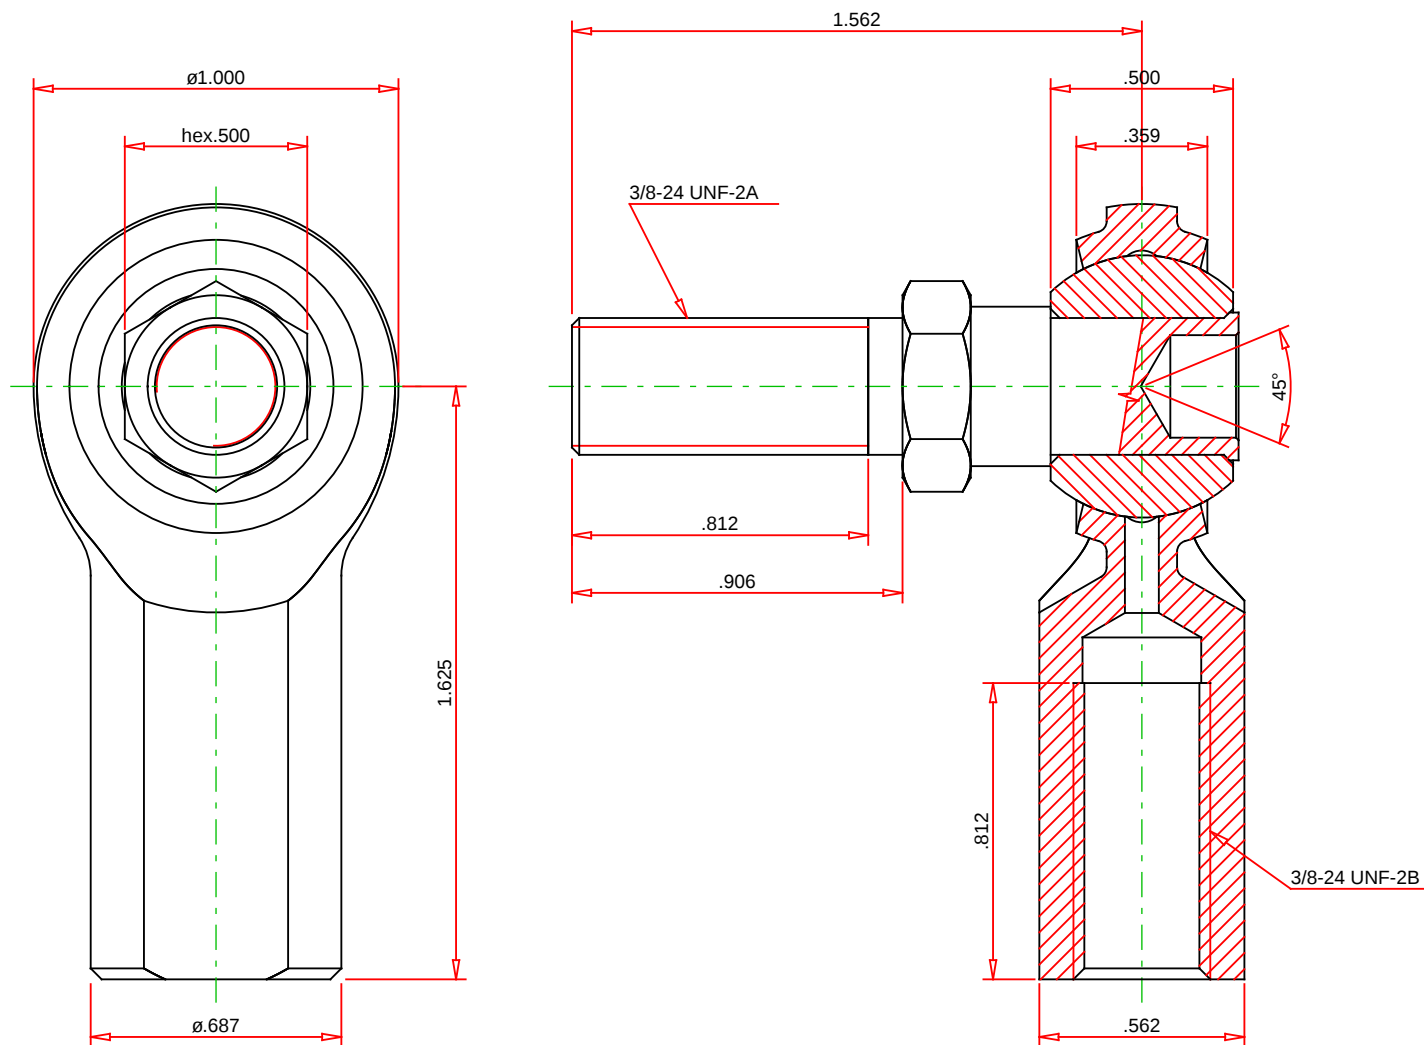

Component Materials

Body:	Low carbon steel - protective coated for corrosion resistance.
Ball:	Alloy steel - heat treated - hard chrome plated.
Stud:	Low carbon steel - protective coated for corrosion resistance. Right hand thread.

Part No. : CW-6S	Description : Aurora Bearing CW-S & CG-S Series Female Rod Ends with Studs - General Purpose - Economy
---------------------	--

Ultimate Radial Static Load Capacity : 1,014 lbs	Note : - Drawing not to Scale - Dimensions subject to change. - Above dimensions are nominal, see catalog charts for tolerances
---	--



The Timken Company
 Address : 901 Aucutt Rd.
 Montgomery, IL 60538
 Tel. : 630.859.2030
 Email : customerservice@aurorabearing.com
 Web : www.aurorabearing.com